

NITTERHOUSE



MASONRY PRODUCTS, LLC

WIND UPLIFT CONNECTION

DESIGNED FOR USE WITH
OUR HIDDEN FASTENING
KIT & PEDESTALS



NITTERHOUSE PAVERS *WITH WIND UPLIFT CONNECTION*

WIND RESISTANCE: < 160 mph

COMPRESSION STRENGTH: Avg 8500 psi

WATER ABSORPTION: Less than 5% (ASTM C140)



Nitterhouse's *NMP Paver Lockdown Pedestal* easily slides into the fixed connection on the pedestal. The hidden connection is snapped into the top of the pedestal to securely lock down the pavers ensuring a safe, secure, and level surface.



NMP PAVER LOCKDOWN PEDESTAL

Base Diameter: 7-43/64" (195 mm)

Height Range: 5/64"- 42- 5/8" (2mm- 1083mm)

Compressive Resistance: 1,984lb minimum

Material: Recycled Polypropylene resistant to mold, alkali, & bitument

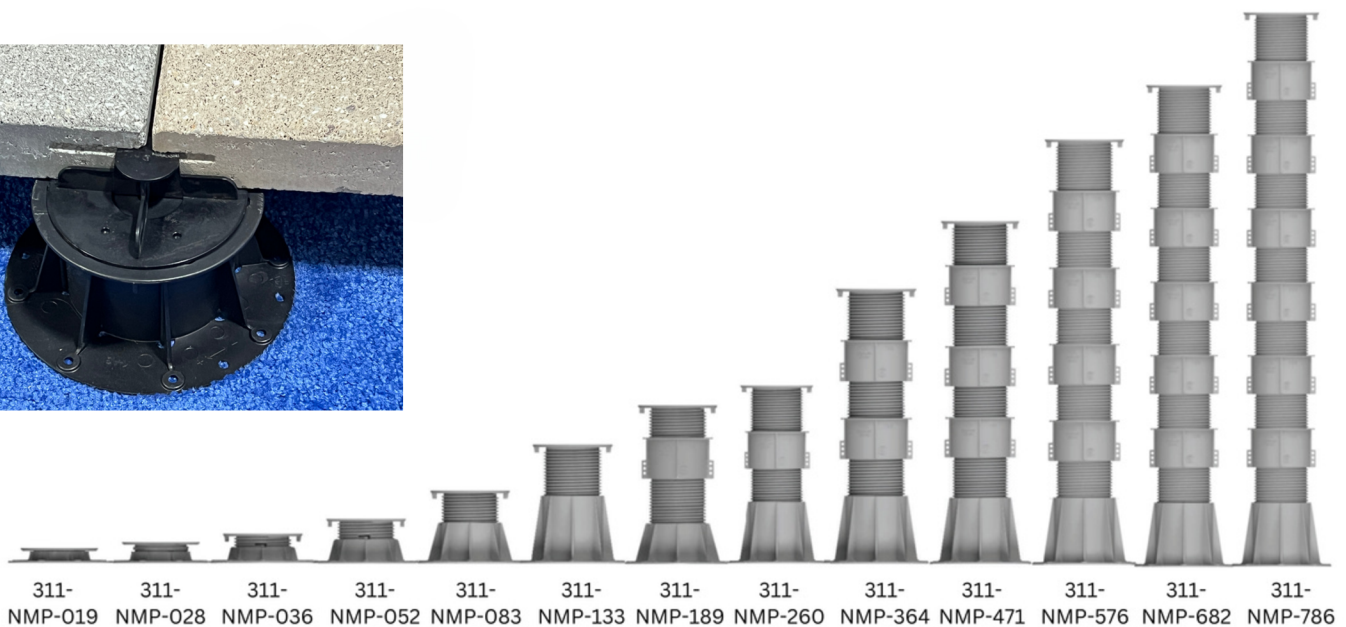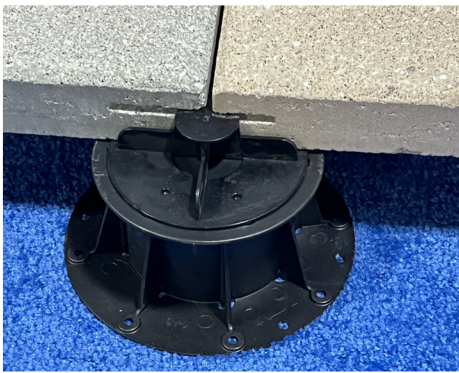

Paver Lockdown
Assembly



Spacer Tab



**Pedestal works with all
Nitterhouse Architectural
& Camina Paving Stones**

NITTERHOUSE

MASONRY PRODUCTS, LLC

